RECEIVED
MAY 07 2015
1736 E SUNSHINE ST. SUITE 417
SPRINGFIELD, MO

LIGHT FIXTURE SCHEDULE

ALL ITEMS LISTED ON THE "LIGHT FIXTURE SCHEDULE" WILL BE SUPPLIED BY THE OWNER (O'REILLY). ITEMS SHALL BE DIRECT ORDERED AND OR RELEASED FROM THE LISTED ELECTRICAL EQUIPMENT DISTRIBUTOR:

GRAYBAR ELECTRIC CO. INC.
11885 LACKLAND ROAD
ST. LOUIS, MO. 63146

ATTN: SANDI YOUNG – DIRECT LINE: 1 (314) 573-2082
OR SAM CAST – DIRECT LINE: 1 (314) 573-2081
sandra.young@graybar.com or samuel.cast@graybar.com
TOLL FREE = 1-800-289-5254
TOLL FREE FAX = 1-888-280-0128

MARK	MFR.	CATALOG NUMBER	SUPPLY VOLTAGE	FINISH	MTG. LAY-IN	MTG. RECESSED	MTG. SURF. WALL	MTG. SURF. CEIL.	MTG. OTHER	LAMPS TYPE FLUOR.	LAMPS TYPE H.I.D.	LAMPS TYPE INCAND.	LAMPS TYPE OTHER	LAMPS QUANTITY	LAMPS (General Electric) LAMP CATALOG NUMBER/TYPE	WATTAGE	DESCRIPTION OF ACCESSORIES	NOTES
EXTERIOR LIGHTS																		
L	PORTFOLIO	LD615D010/ERW6840/6LWOH NO SUBSTITUTIONS	120	CLEAR		X							X	1	----	24.8	---	RECESSED CAN
S1	LSI	WAR-P-150-MH-120-RUS-17FS-KDS96-FG NO SUBSTITUTIONS	120	TEXTURED RUST			X						X	1	–	150	WTRB150 MH MT WHT-REMOTE BALLAST CWB BRACKET PHOTOCELL	MOUNT 11'-0" A.F.F. TO BOTTOM OF FIXTURE. INSTALL 3/8" INSIDE DIAMETER BLACK, 1" LENGTH RUBBER HOSE, ON PHOTOCONTROL (TO SHIELD FROM FLOODLIGHTS)
S2	LSI	WAR-P-150-MH-120-RUS-17FS-KDS96-FG NO SUBSTITUTIONS	120	TEXTURED RUST			X						X	1	–	150	WTRB150 MH MT WHT REMOTE BALLAST CWB BRACKET	MOUNT 11'-0" A.F.F. TO BOTTOM OF FIXTURE.
POLE LIGHTS – SHOEBOX – FORWARD THROW (TYPE IV PATTERN) W/ HOUSE SIDE SHIELD																		
V2	HUBBELL	RCS-A10-P32-H4-F-Q-DB-L-HS-ADV (320 WATT SHOEBOX)	QUAD-TAP	DARK BRONZE					X		X				RE: SU1 FOR QTY.	368	HOUSE SIDE SHIELD	25' POLE LENGTH, ADVANCE BALLASTS, NO SUBSTITUTIONS
	SECURITY LIGHTING	SSS-25-50-1-B2 or C2-DB-LAB B2 (2 LTS. @ 90') or C2 (2 LTS. @ 180')													MVR320/VBU/HO/PA		TAB-36-M38 (FOR POLE)	ANCHOR BOLTS W/ HARDWARE & TEMPLATE

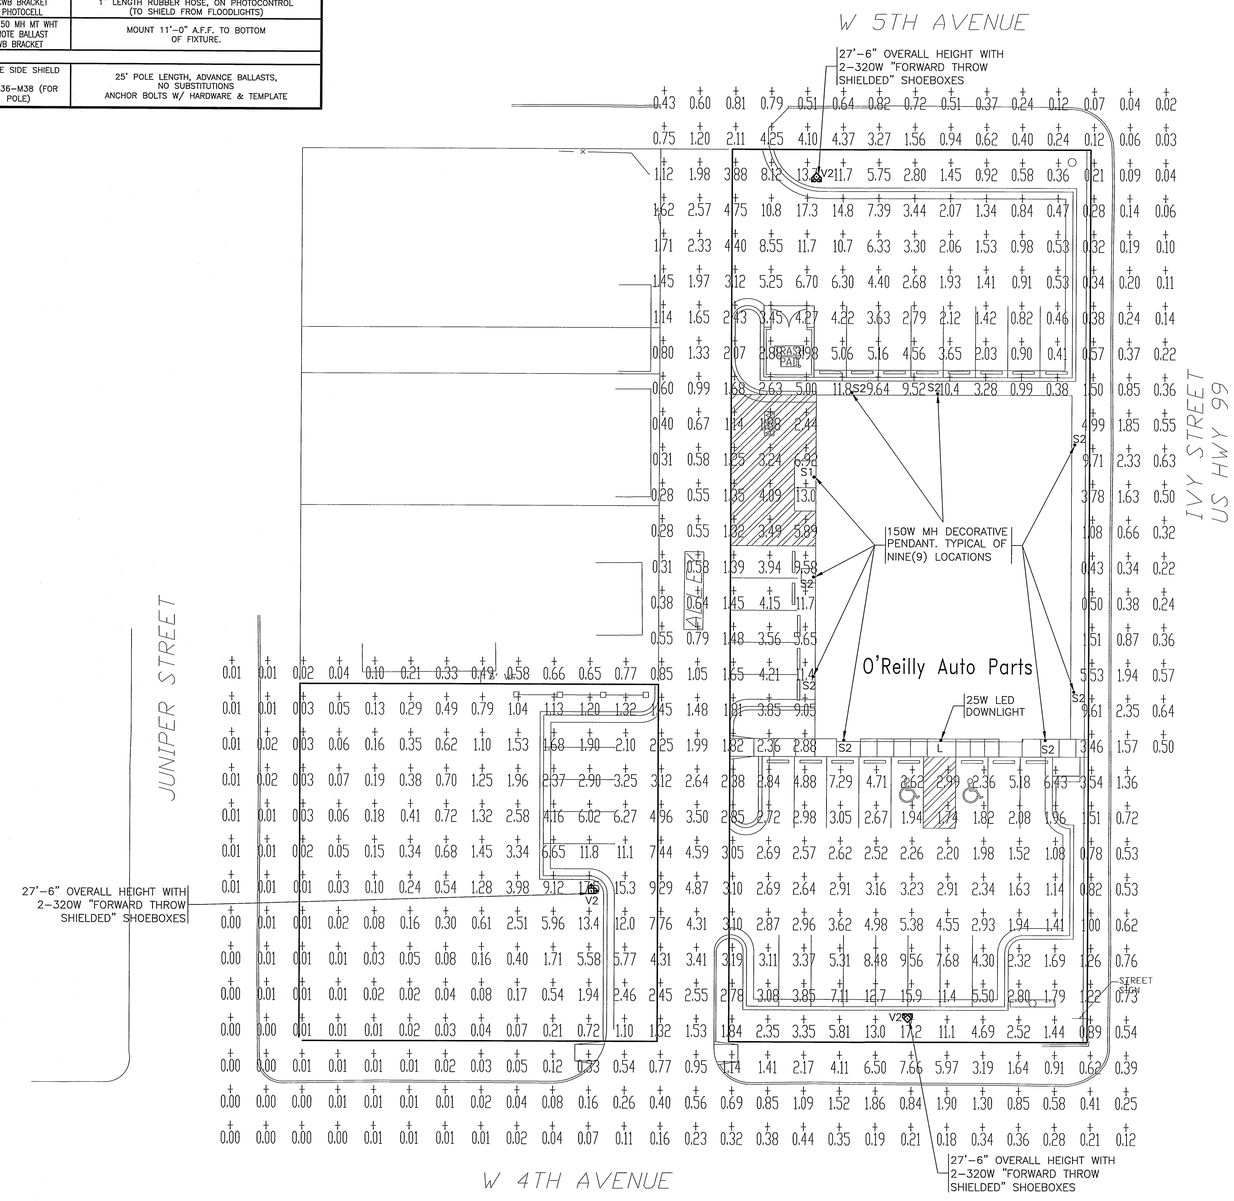

CALCULATION SUMMARY										
AREA NAME	DIMENSIONS	GRID / TYPE	# PTS	SPAC	GROUP	AVE	MAX	MIN	MAX/MIN	AVE/MIN
New Area	265.70x298.22ft	New Grid / H-H	687	10.00	(+)	2.03	17.48	0.00	N/A	N/A

SITE LIGHTING PHOTOMETRICS

SCALE: 1" = 20'-0"

05-07-15
SHEET REVISED IN ITS ENTIRETY.

SGE
SMITH-GOTH ENGINEERS, INC.
3855 S. JEFFERSON AVE. SPRINGFIELD, MO 65807
P: 417-882-2200 F: 417-882-1198
WWW.SMITHGOTH.COM

REGISTERED PROFESSIONAL ENGINEER 83322PE 5/6/15 OREGON JULY 14, 2003 NORMAN E. GOTH
Expires: 6/30/15

Thomas A. Lundberg
ARCHITECT
1736 East Sunshine, Suite 417
Springfield, Missouri 65804
417.862.0558
Fax: 417.862.3265
e-mail: architect@estertyschneider.com

New O'Reilly Auto Parts Store:
IVY STREET
JUNCTION CITY, OR

O'Reilly AUTO PARTS
233 SOUTH PATTERSON
SPRINGFIELD, MISSOURI 65802
417-862-2674 PHONE

COMM #	3484
DATE:	09-27-13
REVISION DATE:	04-23-14
	05-07-15

© COPYRIGHT 2013 - DESIGNS, DRAWINGS AND SPECIFICATIONS ARE INSTRUMENTS OF SERVICE AND ARE THE PROPERTY OF THE DESIGN PROFESSIONAL. REPRODUCTION PROHIBITED WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE DESIGN PROFESSIONAL.